



COVER OPTIONS

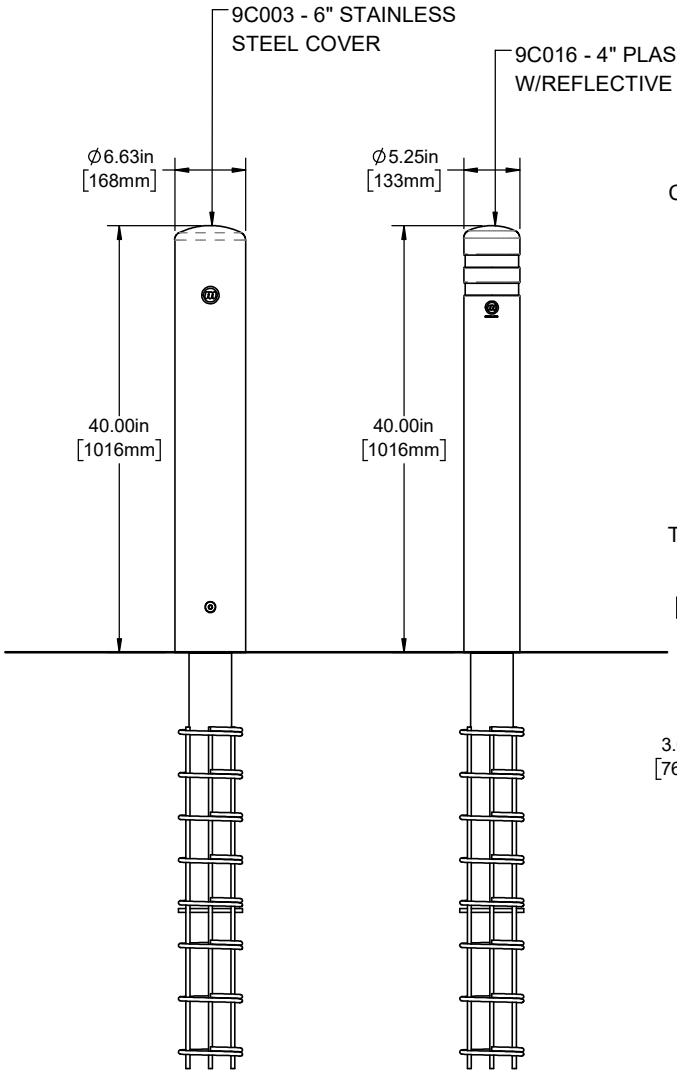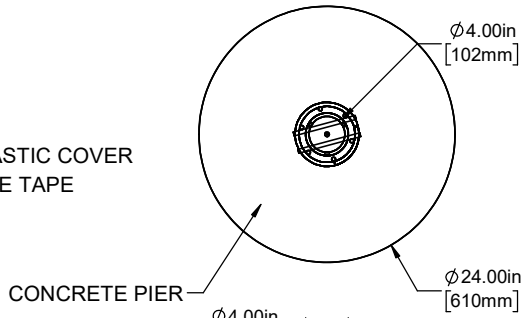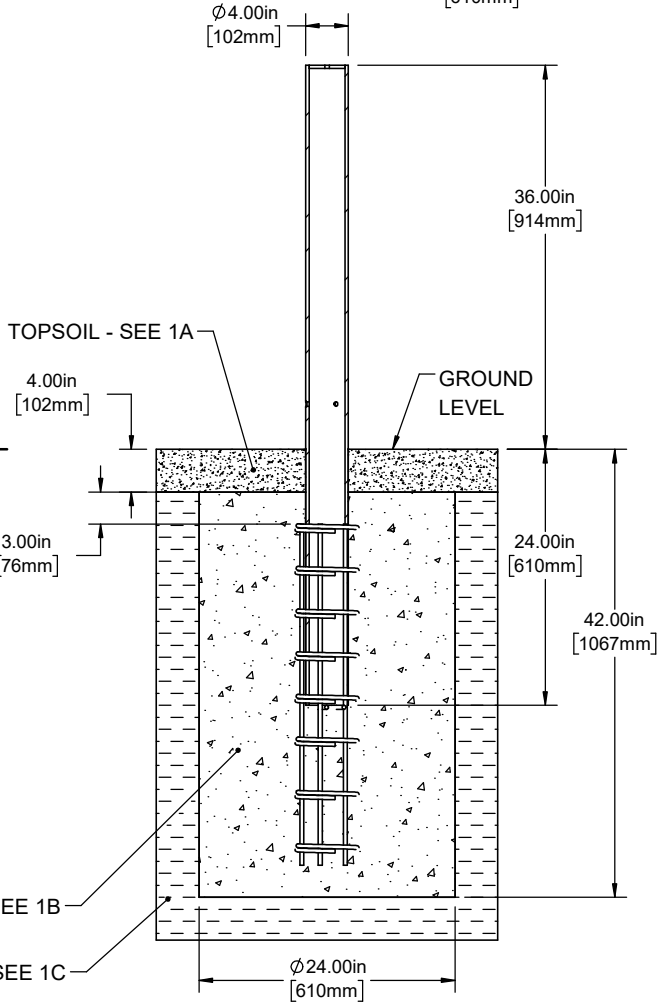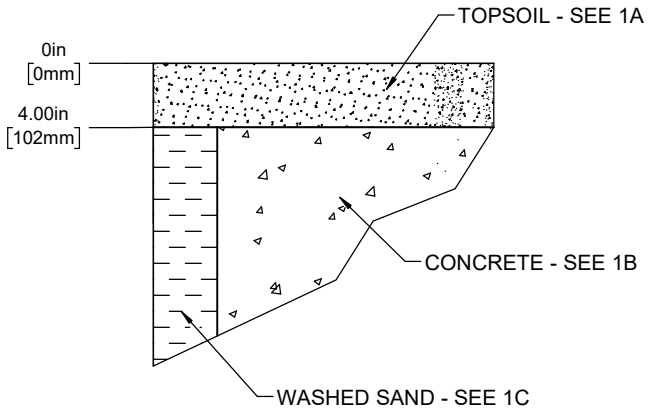


MINIMUM GROUND CONDITIONS REQUIRED

1a: The Topsoil shall be loose, friable, loamy, free of subsoil, clay lumps, stones, roots, and other foreign or toxic matter, and shall contain 3% to 20% organic matter as determined by the loss of ignition of moisture-free samples dried at 100°C.
1b: The concrete is 3000 psi minimum unconfined compressive strength.
1c: The washed sand shall be classified as SP - poorly graded sand & be compacted to a density of not less than 90% maximum dry density in accordance with AASHTO Method of Test T099.

Rev 0 10092026

**Customer Drawing**
**CRASHCORE BOLLARD**
**S10 SOIL**


McCue

**McCue US**
(978) 741-8500
cservices@mccue.com

**McCue UK**
+44 1908-365-511
uksales@mccue.com

**McCue EU**
+49 731 40 38 82 68
eusales@mccue.com

**McCue China**
+86-592-2200 790
rchen@mccue.com

mccue.com



**PROPRIETARY-CONFIDENTIAL:** This document contains information proprietary to McCue Corporation. This information is not to be used in any way, disclosed to others or reproduced, in whole or in part, except as expressly authorized in writing by McCue Corporation. Any reproduction of this document, in whole or in part, must include this notice.