
McCue

mccue.com
cservices@mccue.com

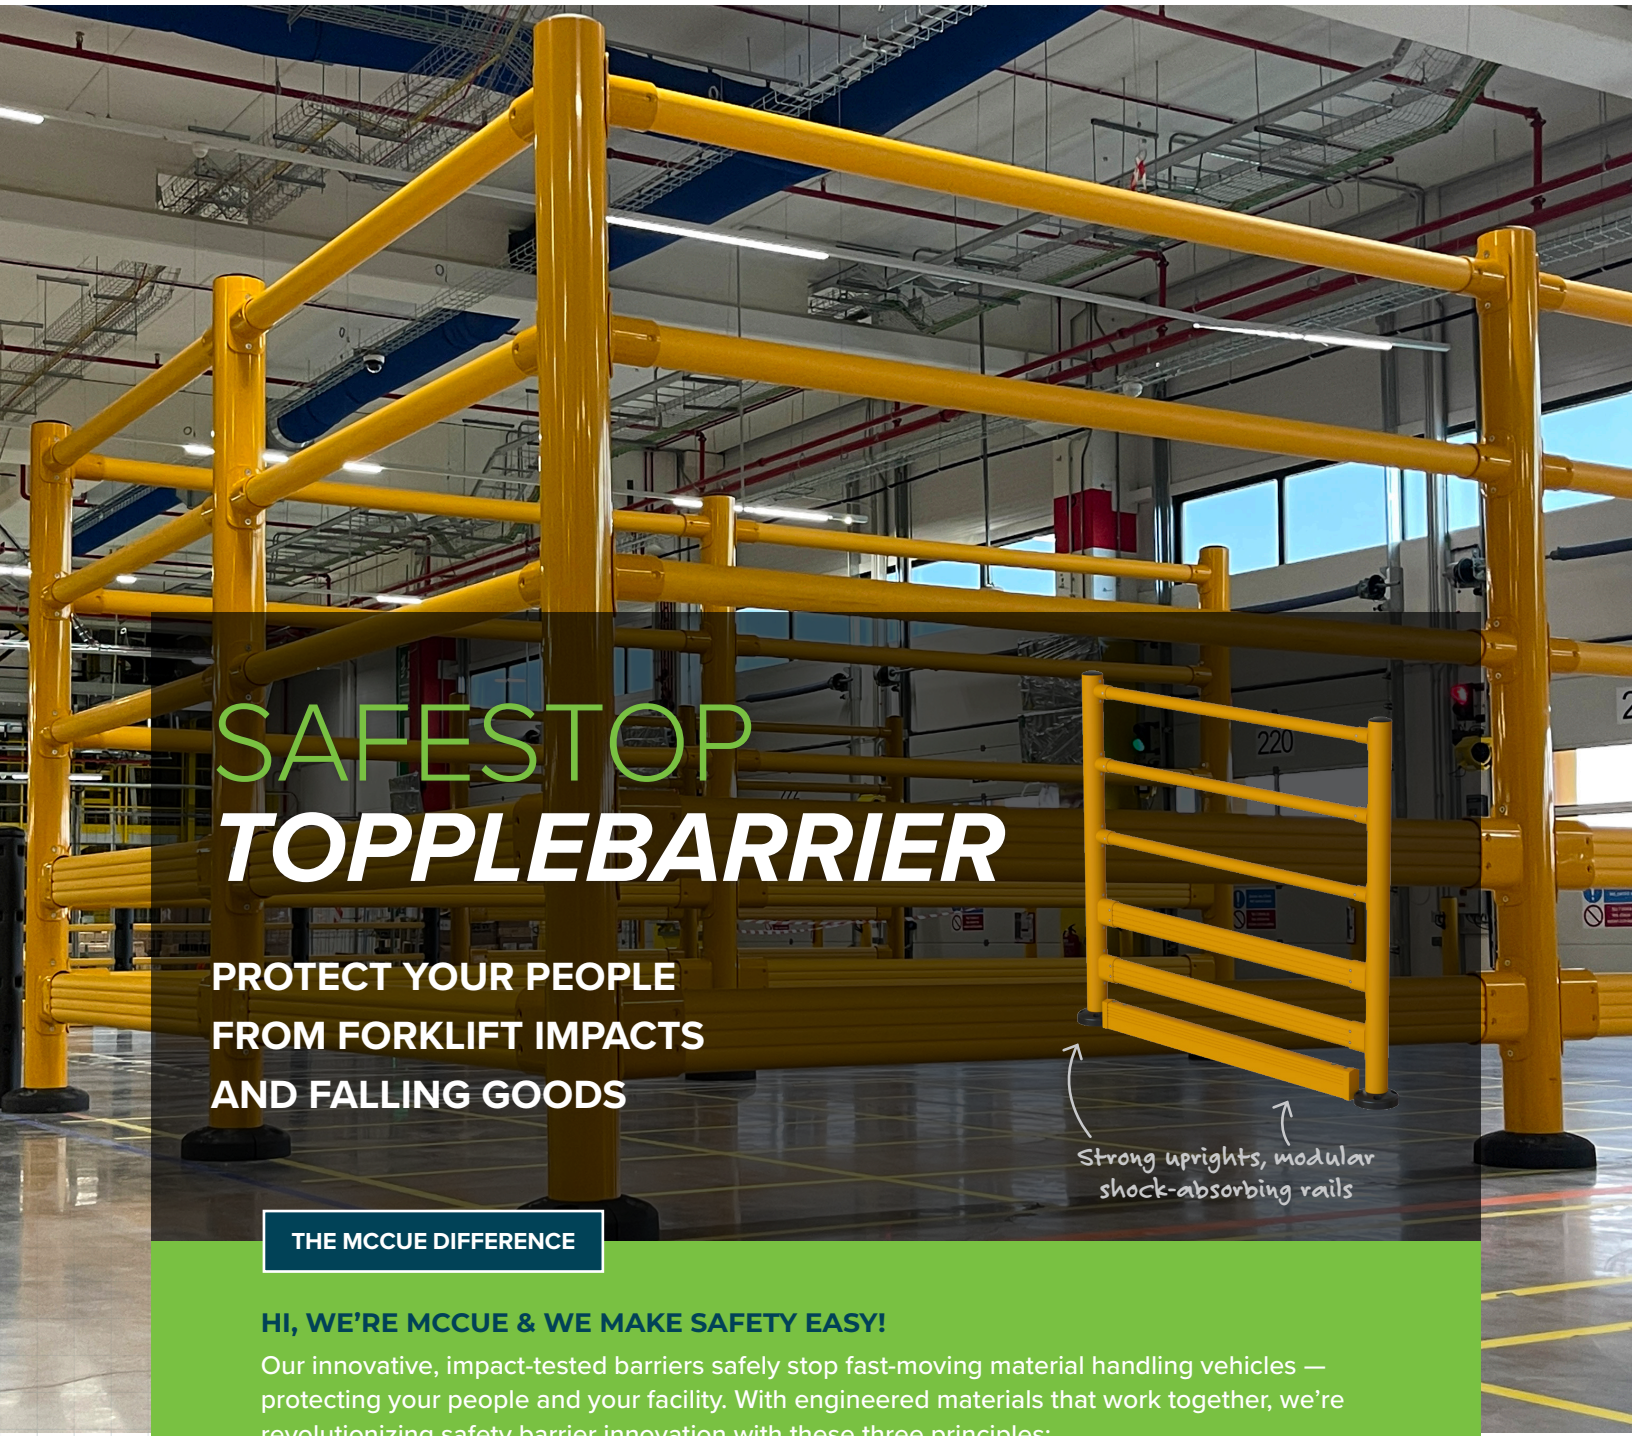

SAFESTOP TOPPLEBARRIER

PROTECT YOUR PEOPLE FROM FORKLIFT IMPACTS AND FALLING GOODS

THE MCCUE DIFFERENCE

HI, WE'RE MCCUE & WE MAKE SAFETY EASY!

Our innovative, impact-tested barriers safely stop fast-moving material handling vehicles — protecting your people and your facility. With engineered materials that work together, we're revolutionizing safety barrier innovation with these three principles:

SAFER IMPACTS
Strong, floor-mounted rail designed to bring heavy trucks to a stop.


SHOCK ABSORPTION
Absorbs impacts — with limited deflection — to keep your people safe.

EASY INSTALL
Simple install with standard hardware and tools.

McCue


IMPACT ABSORBING:
Proprietary rail connection provides unparalleled impact absorbency.



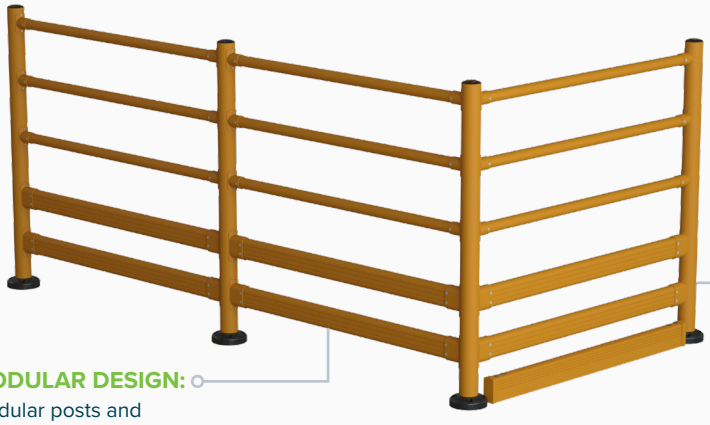

MODULAR DESIGN:
Modular posts and rails allow for endless configurations.

POST & RAIL STRENGTH:
Industry-leading upright strength from shock-absorbing post technology.

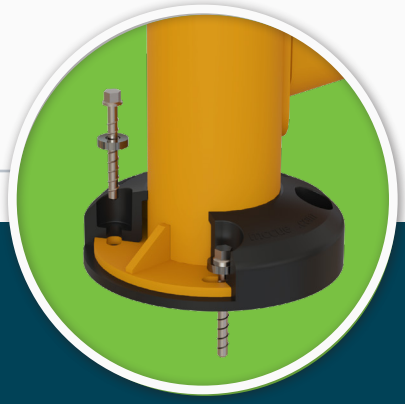


SAFESTOP *TOPPLEBARRIER*

Meet **SafeStop ToppleBarrier**, a strong floor-mounted barrier that safely stops moving material handling vehicles. Engineered to safely absorb impacts —with minimum deflection — to protect your people, workspace, and bottom line.

ENGINEERED FOR ***STRENGTH***



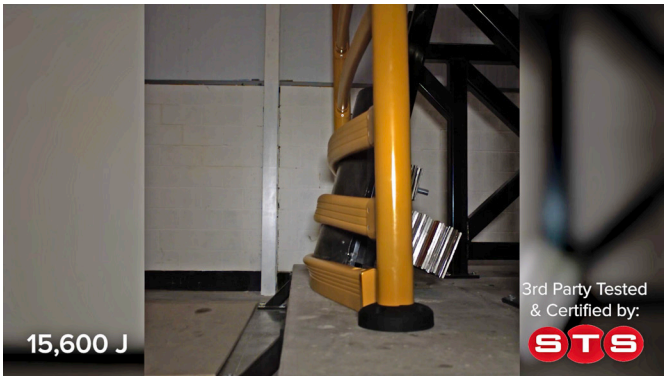

THIRD PARTY TESTING:
Working with McCue, you get the peace of mind that our solutions work because each one undergoes rigorous testing. Third-party lab tests, empirical testing, architectural tests, material composition, corrosion resistance, UV stability — we put our products through the harshest environments to prove they work. Taking the guesswork out of product performance and testing — that's what we do.

THIRD PARTY TESTING & CERTIFICATION PROVIDED BY:

STS

* PATENTS PENDING

mccue.com • cservices@mccue.com


McCue

mccue.com
cservices@mccue.com

IMPACT *TESTING*

SafeStop ToppleBarrier 108

Rigorous product testing at the highest standard.

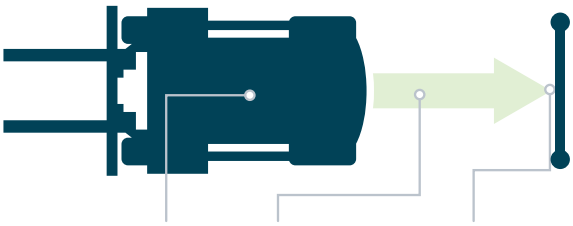

½ MASS **X** VELOCITY^2 = **ENERGY**



Ultimate Strength Rating
21,954ft-lbs (29,766 J)

8755 lbs (3971 kg) X **8.66 mph (13.94 kmh)**

90°	21,954 ft-lbs	29,766 J
45°	43,883 ft-lbs	59,505 J
30°	87,765 ft-lbs	119,009 J

WHAT DOES 21,954 FT LBS (29,766 J) MEAN TO YOU?



Weight:
2,000 lb Pallet Jack



Impact Speed:
18.13 mph at 90°





Weight:
6,000 lb Walkie Rider



Impact Speed:
10.47 mph at 90°





Weight:
10,000 lb Loaded Forklift



Impact Speed:
8.11 mph at 90°





Weight:
18,000 lb Turret Truck




Impact Speed:
6.04 mph at 90°




MATERIAL *PROPERTIES*

BARRIER DEFLECTION: Limited deflection and maximum energy absorption.

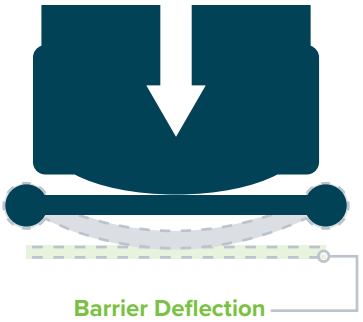

Barrier Deflection
22.5˝ (571.5 mm)

Anchor Specifications:
A shock-absorbing anchor system protects both the anchors and the floor.

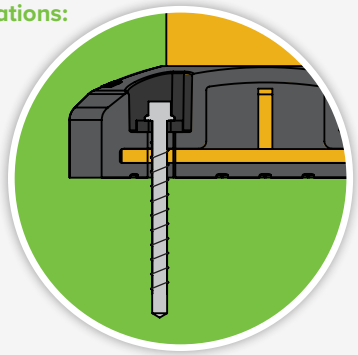

Working Temperatures	32°F-130°F (0°C-54°C)	
Toxicity	Not Hazardous	

Flammability	Does Not Easily Ignite	
REACH / RSCA / DSL	Compliant	


* PATENTS PENDING


mccue.com
cservices@mccue.com


SAFESTOP *TOPPLEBARRIER 108*


SafeStop ToppleBarrier 108

Hardware included.

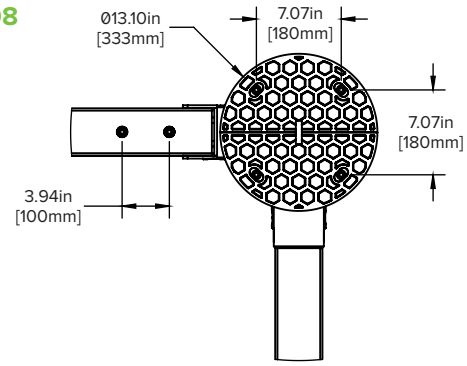

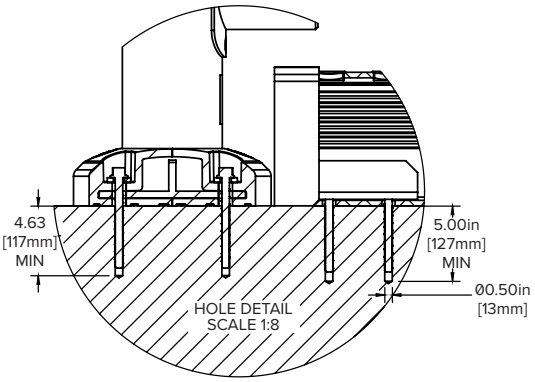

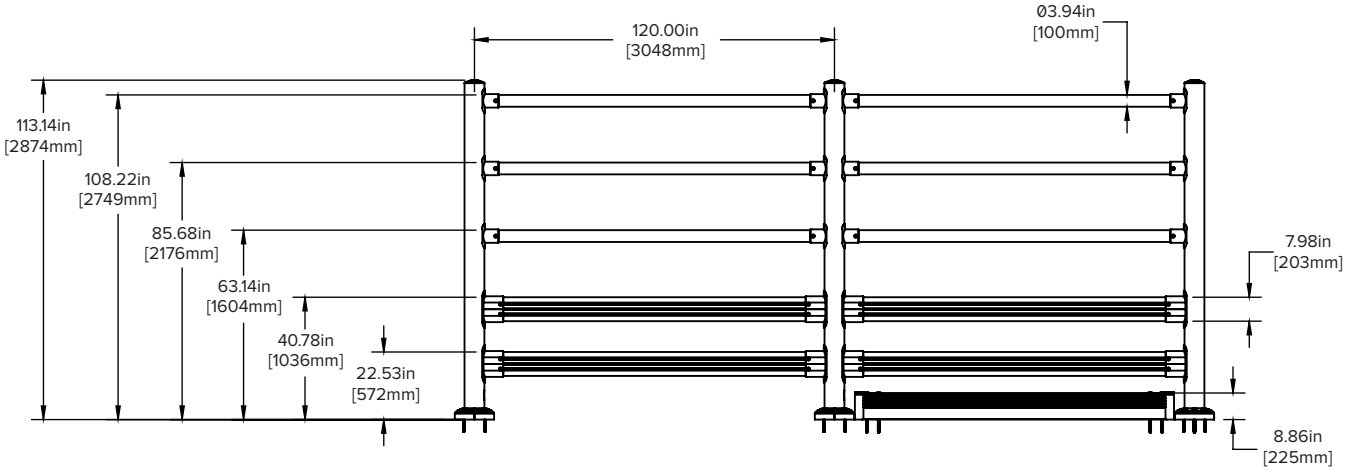

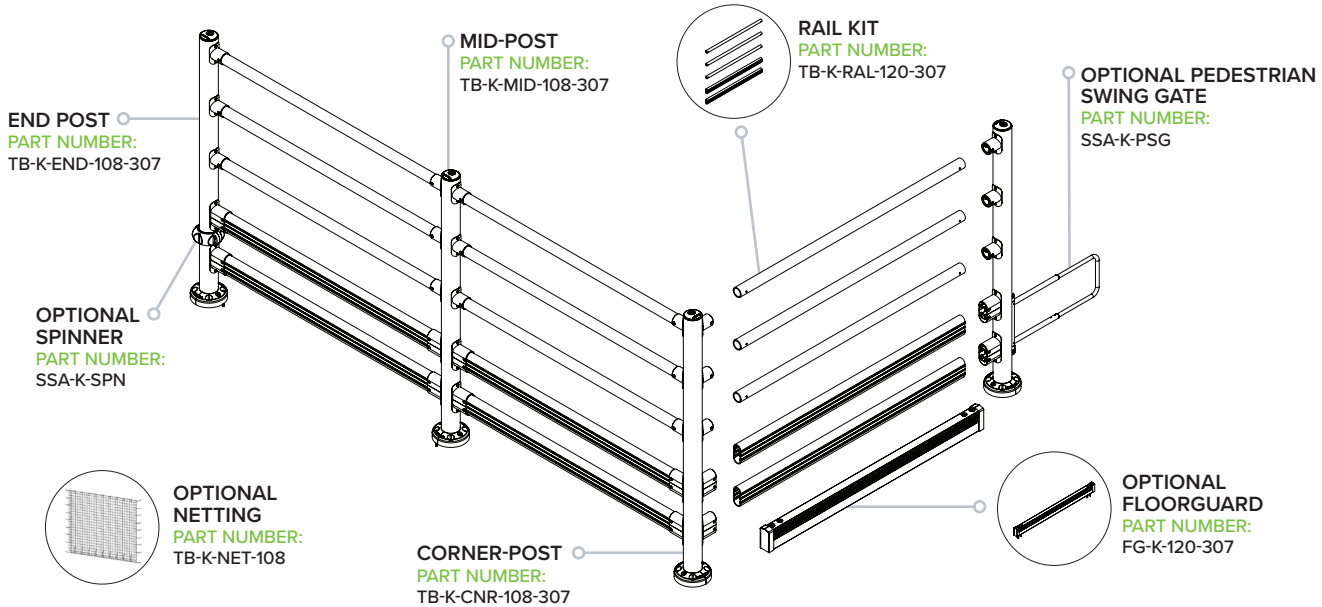


* PATENTS PENDING


mccue.com
cservices@mccue.com


SAFESTOP *TOPPLEBARRIER 176*

SafeStop ToppleBarrier 176

Hardware included.

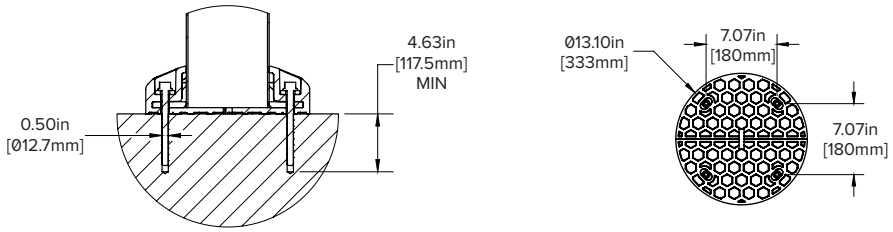

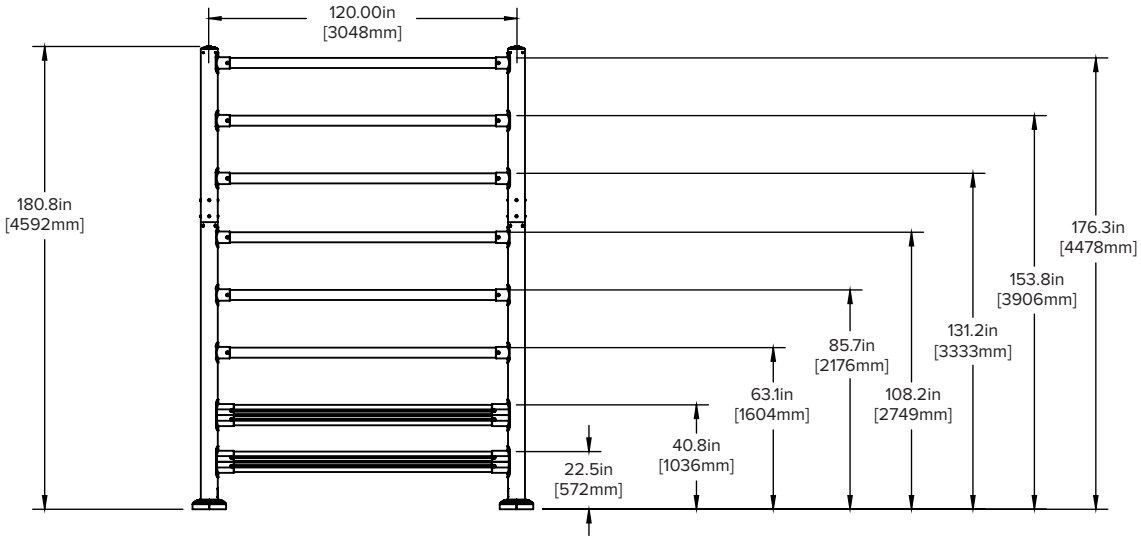

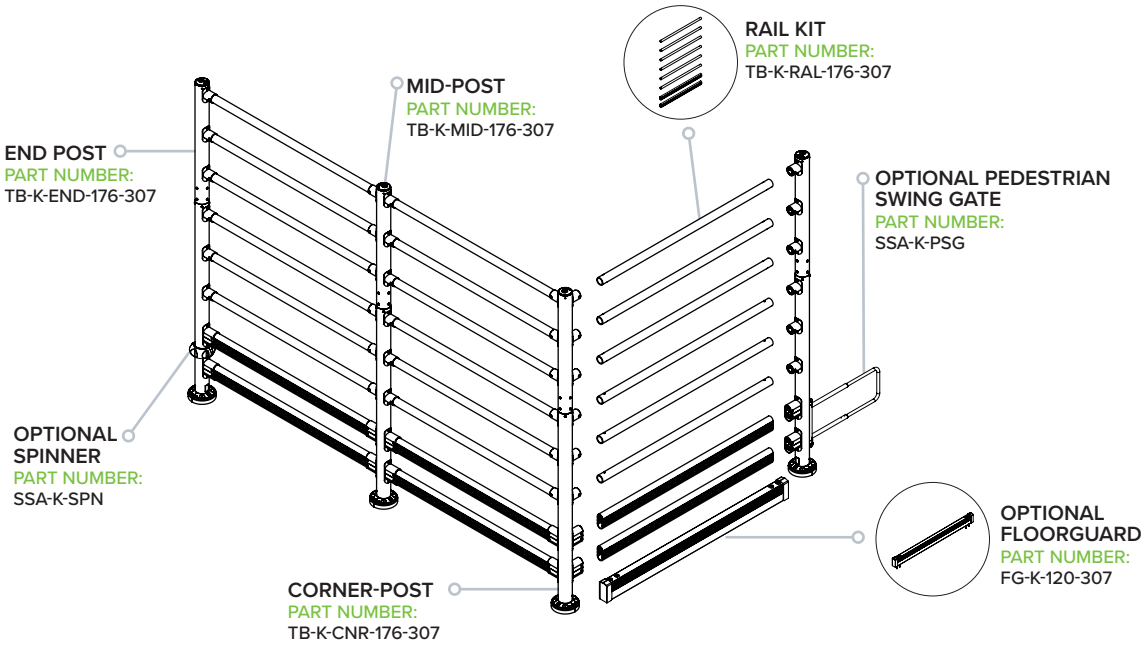


* PATENTS PENDING


mccue.com
cservices@mccue.com


SAFESTOP *TOPPLEBARRIER 244*

SafeStop ToppleBarrier 244

Hardware included.

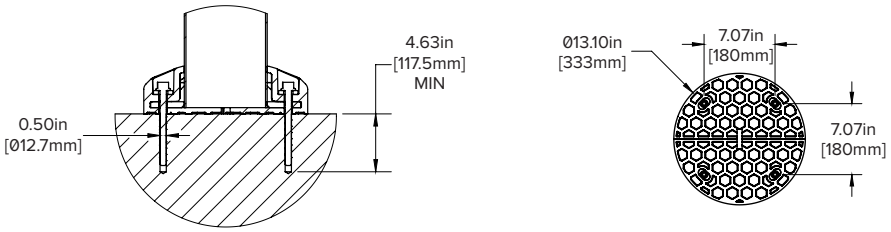

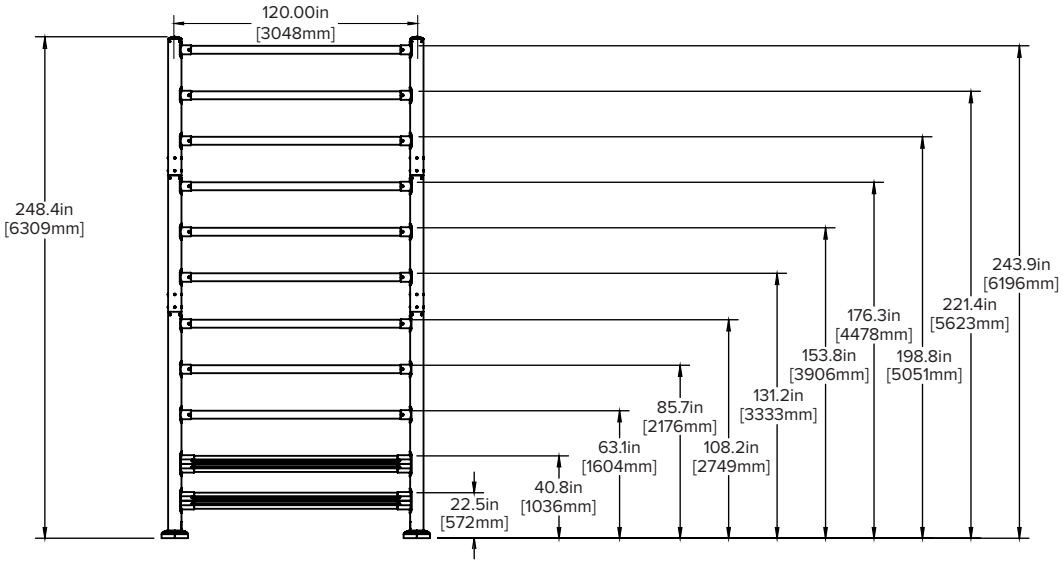

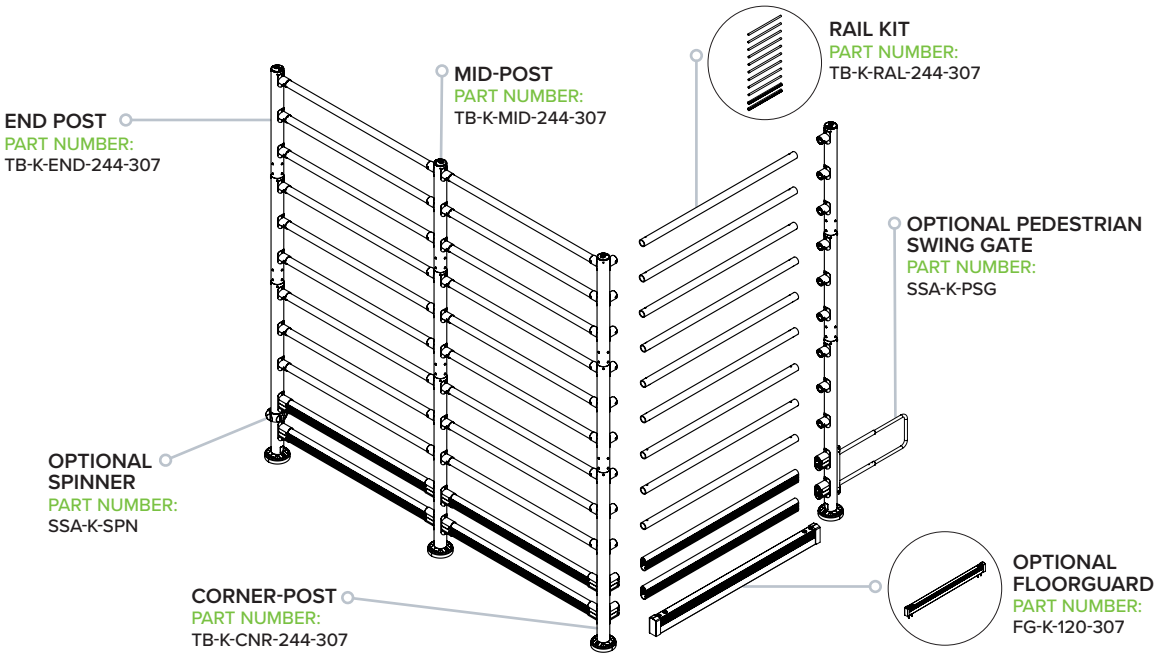

* PATENTS PENDING